

Protection Relay

SGV Controller SGV-1

Nuteck Power Solutions P Ltd.
 1st Floor, 115/5, Ramtekdi Industrial Area,
 Hadapsar, Pune-411013.
 Tel : +91 26811162, Mob : +91 9552545012
 Email : info@nuteck.in
 Web : www.nuteckpowersolutions.com

Surge, Ground Lift and Voltage protection Relay - 1 Phase

• Features:

- Protection against Over / Under voltage, Surge, Ground Lift
- Surge: Max. discharge current 20kA, 8/20uS
- Fast response time (Less than 25ns) for Surge protection
- Fast response time (Less than 100ms) for voltage protection
- User - Friendly LED indications
- Fixed trip setting for Under voltage / Over voltage
- High reliability



SPECIFICATION

Input	Nominal Voltage	240 VAC (withstand 500 VAC L to N)
	Frequency	45 ~ 65 Hz
Output	Relay Contact	1 C/O
	Contact Rating	5A / 250VAC (Resistive)
	Electrical Life	1 X 10 ⁵ Operations at Rated Resistive Load
Voltage & Ground Lift Protection Trip settings	Ground Lift	Yes
	Under Voltage	165VAC +/-2% Voltage setting with respect to neutral
	Over Voltage	275VAC +/-2% Voltage setting with respect to neutral
	Trip Response Time	<100 msec (for UV & OV)
	Reset Mode	Auto
	Hysteresis	5 to 10VAC for UV & OV
	Power on delay	6 to 10 secs.
Indication	LED Indication	Indications for UV/OV OK, GND OK, SPD OK, RLY ON
Surge Protection	Maximum Continuous Operating Voltage Uc	320VAC (L-PE) 510VAC (L-N)
	Nominal Discharge Current In (8/20) uS	10kA
	Maximum Discharge Current Imax (8/20) uS	20kA
	Voltage Protection Level Up	<1.5kV
	Residual Voltage Ures	L1 - PE <1.2kV (at In) N - PE <1.2kV (at In)
Environment	Working Temp.	-5DegC to 70DegC.
	Working Humidity	20 to 90%RH Non Condensing.
	Storage Temp Humidity	-10 to 85DegC 10 to 95% RH.
EMI & EMC	Harmonic Current Emission	Designed to meet IEC 61000-3-2
	ESD	Designed to meet IEC 61000-4-2
	Radiated Susceptibility	Designed to meet IEC 61000-4-3
	Electrical Fast Transients	Designed to meet IEC 61000-4-4
	Surges	Designed to meet IEC 61000-4-5
	Conducted Susceptibility	Designed to meet IEC 61000-4-6
	Voltage Dips & Interruptions (AC)	Designed to meet IEC 61000-4-11
	Conducted Emission	Designed to meet CISPR 14-1
Radiated Emission	Designed to meet CISPR 14-1	
Other	Enclosure Protection	IP-20
	Connectivity	Screw Type Terminal
	Dimension (In mm)	107.5*70*75 (L*W*H)
	Mounting	DIN RAIL EN50022
Note	1. Residual Voltage Vres: UL1449 Measured limiting voltage; the highest value of residual voltage measurement during the application of impulses of 8/20uS nominal discharge current (In); an average voltage value of 15 impulses. 2. Voltage Protection Level Up: IEC61643-11 Voltage protection level; the highest value of residual voltage measurement during the application of impulses of 8/20uS nominal discharge current (In); a rounding voltage value of maximum measurement. 3. Maximum Continuous Operating Voltage Uc: Maximum r.m.s. voltage that could be continuously applied to the SPD. 4. The Under voltage cut-off and Over voltage cut-off setting can be available as per the customer requirement. 5. Specifications are subject to change without prior notice due to constant improvement in design & technology.	



Protection Relay

SGV Controller SGV-1

Nuteck Power Solutions P Ltd.
1st Floor, 115/5, Ramtekdi Industrial Area,
Hadapsar, Pune-411013.
Tel : +91 26811162, Mob : +91 9552545012
Email : info@nuteck.in
Web : www.nuteckpowersolutions.com

Surge, Ground Lift and Voltage protection Relay - 1 Phase

DIMENSIONAL DETAILS

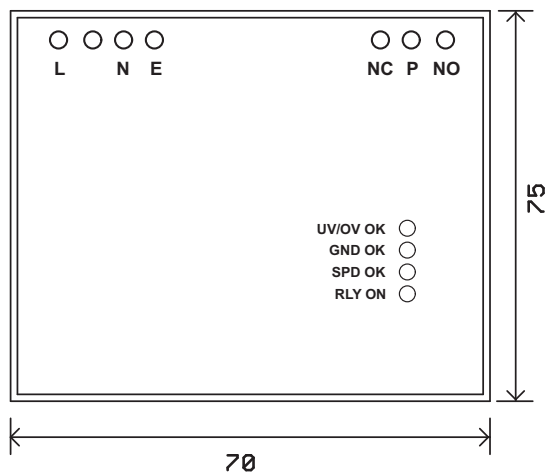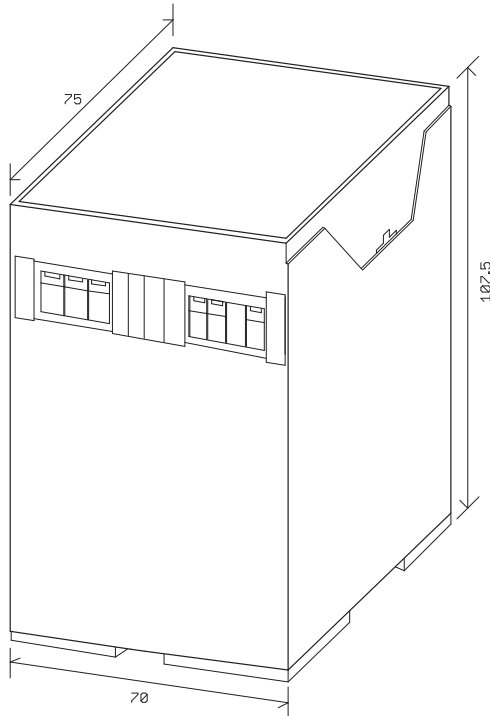

NOTE : ALL DIMENSIONS ARE IN MM

SMPS | DC DC Converters | Adapters | PoE Injectors & Splitters | Battery chargers | Battery Backup Systems
LED Drivers | OVP | AVR | Relay I/O Modules | Protection Relays | Surge Protectors | Inverters | Fan Controllers